


round AccuFlange submittal

AccuFlange SINGLE WALL

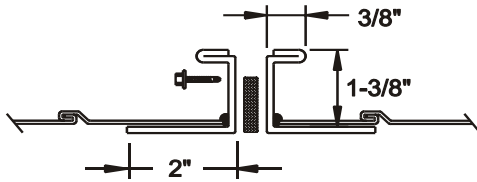

#10 Tek Screw
Screws by Others
Space 6" O.C.

#8 Tek Screw or larger
Space 10" O.C.


5/16" thick by 3/4" wide
closed cell neoprene
gasket by others.

Sealant

GAUGES:
6"-58".....18 gauge
60"-74".....16 gauge
76"-94".....14 gauge

The use of the AccuFlange connecting system, installed and sealed per manufacturer's recommendations, is suitable for use on all systems across a range of internal duct pressures from 10" S.P.W.G. positive to 10" S.P.W.G. negative.

AccuFlange DOUBLE WALL

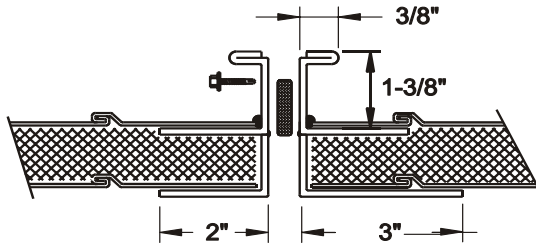

2" Long Inner, shipped
from Algona, WA. 98001


3" Long Inner, shipped
from Salem, VA. 24153

#10 Tek Screw
Screws by Others
Space 6" O.C.

#8 Tek Screw or larger
Space 10" O.C.

5/16" thick by 3/4" wide
closed cell neoprene
gasket by others.
Gasket to be installed
on outer flange.

Sealant

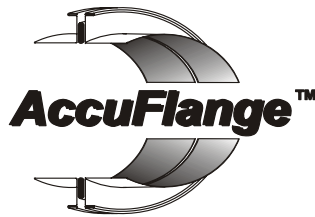

U.S. Patent No. 5,983,496

GAUGES:
6"-58".....18 gauge
60"-74".....16 gauge
76"-94".....14 gauge