

SPIRAQUAD™

SUBMITTAL




CONSTRUCTION Six-Core or Triple Rib lockseam requires no additional sealing. Fewer joints also means less chance for leakage.

CONNECTORS SMACNA HVAC D.C.S. "D" Rated Slip Coupling or T-25a Frame

PERFORMANCE AccuDuct Manufacturing guarantees SpiraQuad, when installed per our recommendations, will meet or exceed the Functional Criteria detailed in SMACNA HVAC D.C.S., Chapter 11.

SPIRAL PROFILE




L	4.755
H	0.050
t	28 - 22 Ga.




L	4.755
H	0.177 - 0.189
t	26 - 22 Ga.

JOINT DETAIL - CFSQ

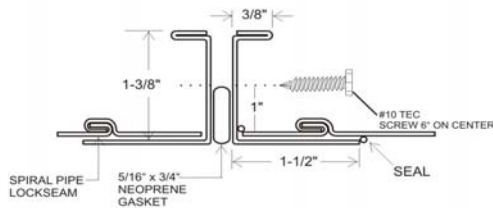

JOINT DETAIL - CPSQ

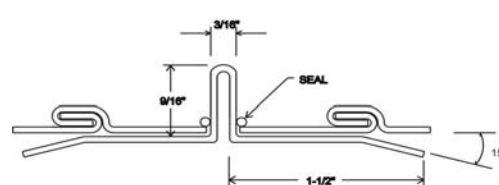

SIZE DATA

Minimum SPIRAQUAD Size	10"x6"
Maximum SPIRAQUAD Size	120"x36"
Maximum Joint Length	20'-0"

Another
Quality
Product
by...



WA Sales - 316 Ellingson Rd. Algona, WA 98001 (253) 939-7741 Fax (253)-939-9931

AZ Sales - 7454 E. Broadway Blvd. #102A Tucson, AZ 85710 (520) 722-8945 Fax (520) 722-0106